



## LAP DETAIL

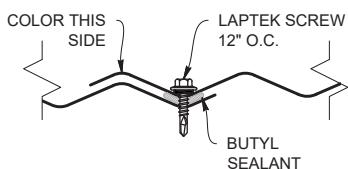

## ROOF & WALL PROFILE

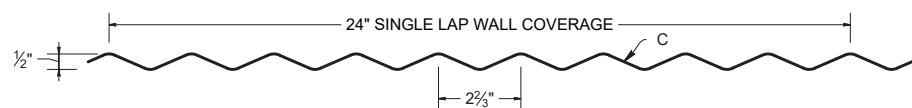

## KEY FEATURES

- 29 and 26 Tru-Gauge™
- 3:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1' to 30'  
(*For longer length panels, please inquire*)
- Long length flashings available up to 20' 11"
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (*please inquire*)
- Fiberglass panels available to match profile
- Manufactured in Salem OR
- OverEZee™ Retro-fit systems available

## TESTING


- ASTM E1680 - Air infiltration (roof)
- ASTM E1646 - Water infiltration (roof)
- ASTM E331 - Water infiltration (wall)
- ASTM E283 - Air infiltration (wall)
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - Zincalume/Galvalume AZ-50/55

## MATERIAL SPECIFICATIONS

- 29 & 26 gauge bare Zincalume® Plus AZ-55  
(*No finish warranty – 25 yr. perforation warranty*)
- 29 & 26 gauge bare G-90 Galvanized  
(*No finish warranty – no perforation warranty*)


## KEY FEATURES

- Zincalume® Plus and Galvanized G-90
- ArmorTech™ Paint System - excellent in exterior durability
- “Cool” color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior Quality, two coat SMP resin system at 1 mil. thickness
- 40-year residential paint warranty
  - fading
  - chalking
  - chipping
  - cracking
  - peeling

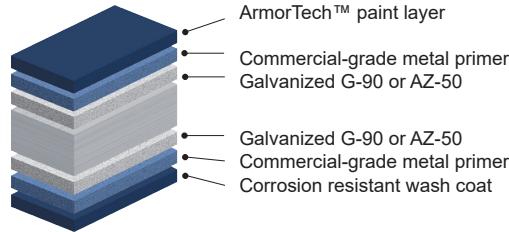


## 40-Year Residential Manufacturer's Limited Warranty

### STANDARD COOL ARMORTECH™ SMP COLORS



Zincalume® Plus SRI-65  
No finish warranty – 25 yr.  
perforation warranty



Galvanized G-90  
No finish warranty – no  
perforation warranty

These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen.  
SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and  
are based on actual testing. \*\*\*Oil canning is not a cause for material rejection\*\*\*



Rev. Date 09-24